

EM02 - ESM with Pentium® III



■ Embedded System Module with:

- ULP Pentium® III / 933 MHz
- ULV Celeron® / 400 MHz
- Up to 512 MB DRAM, CompactFlash
- Graphics, USB 1.1 (front)
- Gigabit Ethernet (front)
- DVI/TFT/video (rear)
- 1 COM, keyboard/mouse, (E)IDE, floppy (rear)
- Stackable with PCI-104

The EM02 is a complete embedded single-board computer for use on any carrier board in different industrial environments. The final application consists either of a stand-alone EM02, the EM02 with an application-specific carrier card and/or with additionally plugged PCI-104 modules.

The EM02 is controlled by an Ultra-Low Power Pentium® III with 933MHz or an Ultra-Low Voltage Celeron® Processor with 400MHz. It provides 16KB L1 cache controlled by processor programmable registers and 512KB/256KB L2 cache for ECC protected cache data array.

The EM02 uses the Intel® 815G chip set, including graphics. It provides one VGA connector, one USB connector Type A and one Gigabit or one Fast Ethernet interface at the front panel. It also has an SO-DIMM socket and a CompactFlash interface on board. As an alternative to onboard USB, legacy I/O is routed to the carrier board via the J2 system connector of the EM02. It includes a serial interface, (E)IDE, a hub interface for DVI/TFT/video, a floppy interface, as

well as two PS/2 interfaces for keyboard and mouse. The EM02 is an ideal computing platform for embedded industrial PCs, offering the whole world of Windows® and Linux based software, e.g. for infotainment applications.

For a first evaluation of the functions of the EM02 it is strongly recommended to use the EK01 ESM starter kit. The kit consists of the standard CPU module, the carrier card with I/O connectors, an external PSU, and an adapter for mounting a PCI-104 module.

ESM modules are complete computers on a plug-on module. They consist of the hardware (CPU, chip set, memory, I/O) which is not fixed to any application-specific function, and an FPGA programmed in VHDL code, which provides I/O that is also still independent of a specific application. ESM modules are based on PCI. They have two system connectors: J1 has a fixed signal assignment, while J2 is variable depending on the final application-specific configuration of the ESM and the carrier board. J2 also feeds the I/O signals of the functions programmed in the FPGA to the carrier card.

Technical Data

CPU

- Celeron® or Pentium® III
- 400MHz or 933MHz processor core frequency
- 256KB or 512KB L2 cache
- 100MHz or 133MHz system bus frequency
- 33MHz APIC bus frequency

Graphics

- Integrated VGA graphics controller
- Connection at front panel via VGA connector

Memory

- 512MB SDRAM
- One 144-pin SO-DIMM socket for synchronous DRAM modules
- 133/100MHz memory bus frequency
- CompactFlash interface
- Type I
- True IDE

Interfaces

- 10/100/1000Base-T PCI Ethernet controller
- 82540(EM) controller
- RJ45 interface at front panel
- Three onboard LEDs to signal LAN Link, Activity status and connection speed (10/100/1000Base-T)
- Supports network boot
- USB 1.1 interface
- Type A
- UHCI implementation
- At front panel
- Data throughput up to 12Mbits/s
- Supplies High-Power (500mA) without external power supply

Mass Storage

- Fast IDE ports
- One IDE hard-disk/CD-ROM port via I/O connector to carrier board
- One IDE port for local CompactFlash

I/O Extension

- Super I/O
- Accessible via J2
- Keyboard
- Mouse
- COM1
- Floppy
- TFT panel
- AC'97 audio (on request)

PCI Interface

- 32-bit PCI interface at PCI-104 connector J1
- Support of 4 external masters

Miscellaneous

- Battery-backed real-time clock
- Integrated hardware monitor

Electrical Specifications

- Supply voltage/power consumption:
 - +5V (4.85V..5.25V), 796mA (Celeron® version)
 - +3.3V (3.2V..3.4V), 794mA (Celeron® version)
- MTBF: 165,000h @ 50°C

Mechanical Specifications

- Dimensions: conforming to ESM specification (PCB: 149mm x 71mm)
- Weight: 215g (incl. heat sink)

Environmental Specifications

- Temperature range (operation):
 - 0..+60°C
 - Industrial temperature range on request
- Airflow: min. 10m³/h
- Temperature range (storage): -40..+85°C
- Relative humidity (operation): max. 95% non-condensing
- Relative humidity (storage): max. 95% non-condensing
- Altitude: -300m to + 3,000m
- Shock: 15g/11ms
- Bump: 10g/16ms
- Vibration (sinusoidal): 2g/10..150Hz

Safety

- PCB manufactured with a flammability rating of 94V-0 by UL recognized manufacturers


EMC

- Tested according to EN 55022 / 1999-05 (radio disturbance) and EN 55024 / 1999-05 (immunity) with regard to CE conformity

Software Support

- Phoenix BIOS
- Windows
- Linux (on request)
- VxWorks (on request)
- QNX (on request)
- RTX (on request)

Diagram

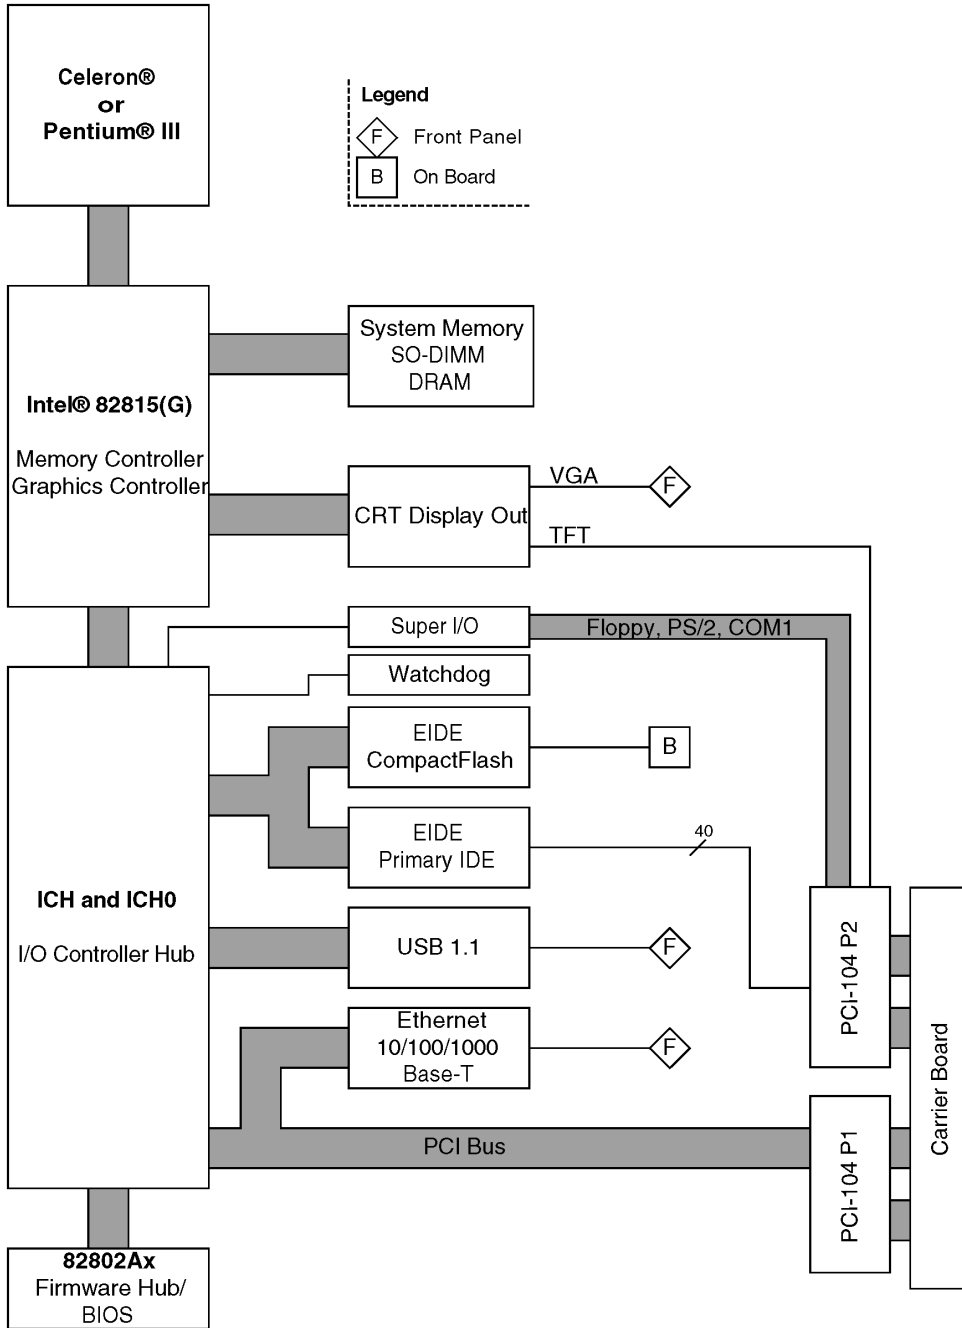

Related Products

Standard Hardware

08EK01-01	ESM evaluation kit: Mini ATX carrier board EC01 with 1 ESM slot, 3 PCI slots, floppy interface; ESM EM02 with ULP Pentium® III / 933MHz, graphics, Gigabit Ethernet, USB; temperature range: 0..+60°C; incl. external PSU and adapter for mounting of one PCI-104 module - 512MB DRAM installed, CompactFlash not installed (08EK01-01 = EC01-03 + EM02-04)
08EK01-02	ESM evaluation kit: Mini ATX carrier board EC01 with 1 ESM slot, 3 PCI slots, floppy interface; ESM EM02 with ULV Pentium® III Celeron®/ 400MHz, graphics, Gigabit Ethernet, USB; temperature range: 0..+60°C; incl. external PSU and adapter for mounting of one PCI-104 module - 512MB DRAM installed, CompactFlash not installed (08EK01-02 = EC01-03 + EM02-07)
08EK01-03	ESM evaluation kit: Mini ATX carrier board EC01 with 1 ESM slot, 3 PCI slots, floppy interface; ESM EM02 with ULV Pentium® III Celeron® 650MHz, graphics, Gigabit Ethernet, USB; temperature range: 0..+60°C; incl. external PSU and adapter for mounting of one PCI-104 module - 512MB DRAM installed, CompactFlash not installed (08EK01-03 = EC01-03 + EM02-09)
15EM02-04	EM02, ESM - Embedded System Module, ULP Pentium® III / 933MHz, CompactFlash slot, 512MB DRAM installed, graphics, Gigabit Ethernet, USB; PCI-104 stackable; temperature range: 0..+60°C
15EM02-07	EM02 for ESM Kit EK01-02, ESM - Embedded System Module, ULV Pentium® III Celeron® / 400MHz, CompactFlash slot, 512MB DRAM installed, graphics, Gigabit Ethernet, USB; temperature range: 0..+60°C
15EM02-09	EM02 for ESM Kit EK01-03, ESM - Embedded System Module, ULV Pentium® III Celeron® / 650MHz, CompactFlash slot, 512MB DRAM installed, graphics, Gigabit Ethernet, USB; temperature range: 0..+60°C

Please refer to our ESM - Embedded System Modules compare chart for a selection of further single-board computers with different processors and on-board functionality.

Accessories

0751-0006	CompactFlash card, 512MB, Type I, 0..+60°C
0751-0008	CompactFlash card, 64MB, Type I, 0..+60°C
0751-0009	CompactFlash card, 128MB, Type I, 0..+60°C
0751-0012	CompactFlash card, 256MB, Type I, 0..+60°C
0751-0018	CompactFlash card, 256MB, Type I, -40..+85°C
0752-0096	512MB DRAM 0..+60°C for 15EM02-04 (08EK01-01)
0752-0156	512MB DRAM 0..+60°C for 15EM02-07 (08EK01-02)

Related Products

0752-0166 512MB DRAM 0..+60°C for 15EM02-09 (08EK01-03)

Software

This MEN board is designed to work in a Microsoft® Windows® environment. This does not imply that the complete board functions have been tested in this environment, nor that specific MEN BSP or driver packages are available. If you don't find ordering numbers for additional Windows® driver packages provided or recommended by MEN, please contact sales.

QNX® software for this MEN board is available from QNX® (www.qnx.com). This does not imply that the complete board functions have been tested in this environment, nor that specific MEN BSP or driver packages are available. If you don't find ordering numbers for additional QNX® BSP or driver packages provided or recommended by MEN, please contact sales.

VxWorks® software for this MEN board is available from WindRiver Systems. This does not imply that the complete board functions have been tested in this environment, nor that specific MEN BSP or driver packages are available. If you don't find ordering numbers for additional VxWorks® BSP or driver packages provided or recommended by MEN, please contact sales.

This board is an MEN product running Linux. This does not imply that the complete board functions have been tested in any Linux environment, nor that specific MEN BSP or driver packages are available. If you don't find ordering numbers for additional Linux BSP or driver packages provided or recommended by MEN, please contact sales.

13EM02-70	Windows® 2000/XP graphics driver (Intel® graphics driver for 815 chipset) for A13, EM02 (ESM kit EK01)
13EM02-71	Windows® 2000/XP network driver (Intel®) for A13 and EM02 (ESM kit EK01) - only for 933MHz versions!
13Z011-06	MDIS4/2004 low-level driver sources for F7/F7N/D4/EM02 watchdog
13Z011-70	MDIS4/2004 Windows® NT4/W2K driver for F7/F7N/D4/EM02 watchdog

Documentation

20ABMX-00	Phoenix BIOS user manual
20EK01-00	EK01 user manual, includes EM02 user manual (20EM02-00)
20EM02-00	EM02 user manual

For the most up-to-date ordering information and direct links to other data sheets and downloads, see the EM02 online data sheet under www.men.de. --> [Click here!](#)

Contact Information

Germany

MEN Mikro Elektronik GmbH
 Neuwieder Straße 5-7
 90411 Nuremberg
 Phone +49-911-99 33 5-0
 Fax +49-911-99 33 5-901
 E-mail info@men.de
 www.men.de

France

MEN Mikro Elektronik SA
 18, rue René Cassin
 ZA de la Châtelaine
 74240 Gaillard
 Phone +33 (0) 450-955-312
 Fax +33 (0) 450-955-211
 E-mail info@men-france.fr
 www.men-france.fr

UK

MEN Micro Ltd
 Whitehall, 75 School Lane
 Hartford, Northwich
 Cheshire UK, CW8 1PF
 Phone +44 (0) 1477-549-185
 Fax +44 (0) 1477-549-178
 E-mail info@menmicro.co.uk
 www.menmicro.co.uk

USA

MEN Micro, Inc.
 PO Box 4160
 Lago Vista, TX 78645-4160
 Phone (512) 267-8883
 Fax (512) 267-8803
 E-mail sales@menmicro.com
 www.menmicro.com

The date of issue stated in this data sheet refers to the Technical Data only. Changes in ordering information given herein do not affect the date of issue.

All brand or product names are trademarks or registered trademarks of their respective holders.

Information in this document has been carefully checked and is believed to be accurate as of the date of publication; however, no responsibility is assumed for inaccuracies. MEN Mikro Elektronik accepts no liability for consequential or incidental damages arising from the use of its products and reserves the right to make changes on the products herein without notice to improve reliability, function or design. MEN Mikro Elektronik does not assume any liability arising out of the application or use of the products described in this document.

The products of MEN Mikro Elektronik are not suited for use in nuclear reactors and for application in medical appliances used for therapeutical purposes.

Application of MEN's products in such plants is only possible after the user has precisely specified the operation environment and after MEN Mikro Elektronik has consequently adapted and released the product.

Copyright © 2005 MEN Mikro Elektronik GmbH. All rights reserved.